

DATASHEET

REPEATER03 by SALTO

The advanced SALTO online wireless solution is the next step in battery operated access control. SALTO's Wireless solution brings real-time two-way encrypted communication between our wireless locks and the operator.

www.saltosystems.com

TECHNICAL SPECIFICATIONS: BLUENET REPEATER - REPEATER03

SALTO
inspired access



TECHNICAL DATA:

Housing dimensions (H x W x D):	83 x 83 x 34 mm
Weight:	118 g
Cover material:	ABS V0 plastic
IP class:	Not suitable for outdoor use
Certifications:	CE, FCC/IC, RCM, SRRC

ELECTRONIC FEATURES:

Power:	12V through included power supply
Firmware update:	Via ProAccess SPACE through Ethernet connection
LED lamps:	Blue signalling led
Number of BLUEnet locks:	Max 16
Number of BLUEnet Repeaters per gateway :	Max 6
GATEWAY compatibility:	GATEWAYx3C
IQ compatibility:	IQ 2.0*

* It is not permitted to add BLUEnet locks to the IQ when using BLUEnet Repeaters

TECHNOLOGY PLATFORMS:**SALTO SPACE:**

Smile - Selfprogrammable	—
ROM:	—
SVN data-on-card:	•
SALTO RFnet:	—
SALTO BLUEnet:	•

SALTO KS:

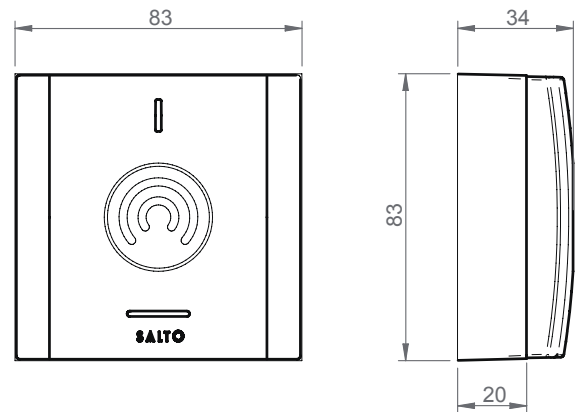
SALTO KS:	•
-----------	---

SALTO SALLIS:

SALLIS:	—
---------	---

FINISHES:

Black:	•
White:	•
Clear Grey:	•

TECHNICAL DRAWING:**ELECTRICAL CHARACTERISTICS:****Operations conditions:**

	Min	Typ	Max	Unit
Temperature (without condensation):	-20	25	70	°C
Humidity:	35	-	85	%

BLUEnet Characteristics:

Frequency range:	2400-2483,5 Mhz
RF standard:	Bluetooth Low Energy
Indoor radio range:	10/15m
Max output power:	8dBm

Power Supply for BLUEnet:

	Min	Typ	Max	Unit
Input Voltage	7	12	28	v
Current consumption:	-	-	75	mA